

Model Information



■ Features

- Connects a PC to CAN bus via Ethernet, WLAN and Internet
- Supports CAN 2.0A and CAN 2.0B
- CAN High Speed up to 1 MBit/s
- **New:** Secure Remote Access by [viaVPN](#)
- Wireless network IEEE 802.11b/g/n
- LAN 1000/100/10 Ethernet auto-detect
- Remote Frame support, Listen only mode
- CAN Bridge operation
- Supports Windows 2000 to Server 2012, CE
- Supports Linux (x86, x86-64, ARM)
- Supports C/C++, C#, VB.NET, Delphi and LabVIEW
- CANopen supported by CANFestival
- Driver emulates serial port for easy access
- Library (DLL) for standard access
- ASCII conversion protocol via TCP/IP
- Supports Bosch Busmaster Debugging
- Metal case


[Contact Online...](#)

VScom NetCAN Plus 120 WLAN

(Net-CAN 120 WLAN)

[Quick Link:](#) | [Features](#) | [More Pictures](#) | [Overview](#) | [Application](#) | [CAN](#) | [Network](#) | [Remote Access](#) | [Operating Modes](#) | [Special Features](#) | [Security](#) | [Driver and Software](#) | [Power and Environment](#) | [Standards](#) | [Ordering Information](#) | [Options](#) | [Packaging](#) |

■ More Pictures

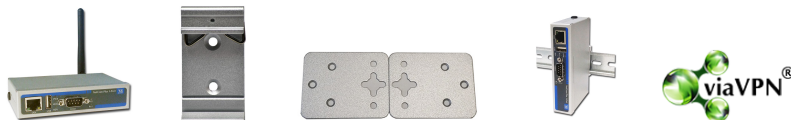

Click on the thumbnails for the large picture ...

[>Back to top](#)

■ Overview

The VScom NetCAN+ 120 WLAN is an easy to use gateway from Ethernet to CAN-Bus, based on state of the art RISC components. It provides CAN-BUS communication over Ethernet and WLAN, and allows completely secured communication for both data transfer and configuration to the attached CAN devices.

CAN BUS is widely used in industrial applications as well as in automotive monitoring and control. The VScom NetCAN+ can be used to monitor the data traffic as well as sending control information.

Implemented in the NetCAN+ is an option to use [the viaVPN system](#) for Remote Access and Monitoring. [viaVPN](#) provides secure and strong encrypted access via Internet, without any re-configuration of firewalls. Once installed in the local network the NetCAN+ are used exactly as without the option viaVPN. But at the same time the operation can be monitored from remote locations. If the CAN port is not occupied by local access, also operation from remote is possible.

NetCAN+ supports three operating modes: TCP Raw Server, CAN Bridge and Driver Mode. With TCP Raw Server the communication is handled directly via IP address and port number. The CAN Bridge connects two NetCAN+ devices to tunnel CAN data via Ethernet/WLAN. The Driver Mode requires the installation of a virtual com-port driver, which makes the network fully transparent for the application. NetCAN+ provides various software tools to interface the user application:

- The ASCII conversion protocol is useful in developing and testing any CAN-BUS configuration. Users just connect directly via Telnet, and have a simple way to talk to the CAN controller. It can

also be used to manually transmit and receive CAN frames.

- Applications programmed by users should use the VScan API library (DLL), which transparently handles the ASCII conversion for the CAN frames. Programmers have to handle only the CAN frames and status information, they do not have to care more about the ASCII conversion in their applications. This API is supported in C/C++, C#, VB.NET, Delphi and LabVIEW.
- In Linux SocketCAN can be used as alternative to vs_can_api library. VScan CAN devices support standard Serial Line CAN (slcan) driver (see [this FAQ](#)).
- The NetCAN+ also supports CANFestival, an Open Source CANopen Framework. CANopen is a CAN-based higher layer protocol that is used in various application fields, such as medical equipment, offroad vehicles, maritime electronics, railway applications or building automation. CANopen unburdens the developer from dealing with CAN-specific details such as bit-timing and implementation-specific functions. It provides standardized communication objects for real-time data, configuration data as well as network management data.
- CANHacker, a tool for analyzing and transmitting frames on the CAN BUS, is included in the product package. This requires the Driver Mode.
- A set of Mapper DLLs simulates CAN hardware from other manufacturers. Users configure their system for those products or the NetCAN+ 110 adapter as a replacement. So existing software will use the NetCAN+ without replacing the application or modifying it.

■ Application

- Industrial / Factory / Laboratory automation
- SCADA system
- Railway applications
- Maritime electronics
- Wafer fabrication system
- Automotive test equipment
- Medical equipment
- off-road vehicles

■ CAN

Speed	CAN High Speed (20kbit/s up to 1Mbit/s) for transmit/receive
Signals	CAN_H, CAN_L, CAN_GND
Connector	DSub9 male
LED	CAN activity (Data), CAN Error

[>Back to top](#)

■ Network

Ethernet interface	Auto-detecting 1000BaseT/100BaseTx/10BaseT (GigaLAN) Connector 8P8C (RJ45)
Wireless interface	via internal module IEEE 802.11b/g/n operation in Access Point or Client Mode
Connector type	SMA-Reverse for WLAN antenna
Protocols	TCP/IP, Telnet, DHCP, ICMP, HTTP, SNMP v1/2c/3, DNS
LED	Ethernet Link+Speed, WLAN

[>Back to top](#)

■ Remote Access

Connect via Internet	The system viaVPN provides secure and easy access to remotely installed devices. The installation is quickly done and provides convenient tools to get access from all locations
Security	All connections use VPN-tunnels encrypted by SSL and AES-256. And even when remote access to a NetCom Plus Server is possible, this does not provide access to the network the Server is installed in.
Firewall friendly	Access to the viaVPN Cloud Servers is done like https protocol in a browser. If web pages can be viewed from a location, access to the Cloud is also possible. No re-configuration of firewalls required.

[>Back to top](#)

■ Operating Modes

TCP Raw Server	Raw Data transfer over TCP/IP. Accepts multiple incoming connections.
CAN Bridge	CAN networks are connected via TCP/IP (WLAN or Ethernet). A client connects to a Server, CAN frames received on one network are repeated on the other network.

Driver Mode

Vscom Driver for

- Windows 2000, XP up to Windows 8.1
- Windows Server 2000 up to 2008 R2

Driver Mode creates a virtual Com port.

[>Back to top](#)

■ Special Features

Installation

Configuration utility automatically finds NetCAN devices in the network

Operating Mode

Automatic Mode switching between Driver and TCP Raw Server Mode.

Configuration

Over Driver Panels, NetCOM Manager, WEB Browser, serial Console, Telnet, SNMP

SNMP

special VScom MIB included

DNS

Domain Name Server support

Firewall

special precautions for Firewall environments in Driver Mode

Firmware

Firmware update over WEB Browser, Telnet

[>Back to top](#)

■ Security

Password access

Every capabilities of configuration use the same password including SNMP V3

Secure communication

OpenVPN tunnel provides security on WLAN and Ethernet. The tunnel protects the configuration as well as all serial data. It is also usable across the Internet. Strong encryption by SSL-AES up to 256 bit keys

[>Back to top](#)

■ Driver and Software

Library

- Unified VSCAN API for simple access on all Vscom CAN products.
- Supports Windows, CE, Linux (x86, x86-64, ARM) targets.
- Supports C/C++, C#, VB.NET, Delphi and LabVIEW.

Linux system

Supports SocketCAN (slcan driver) since kernel 2.6.38+
Also see [this FAQ](#)

Compatibility

Mapper DLLs can simulate software interfaces of CAN adapters from other manufacturers.

CANopen

The library CANFestival implements the CANopen functions.
Provided examples show Master/Slave communication

Speed

CAN Speed selectable up to 1 Mbit/s

Transfer

ASCII coding mode

CAN Modes

Standard Mode
Normal operation on CAN bus
Listen Mode
Passive receive of CAN Frames, neither ACK bits nor Error Frames are sent
Self Reception (Echo Mode)
For testing: Transmitted Frames are also received by the adapter

Monitoring Tools

- NetCAN+ and VSCAN API are supported by Bosch BUSMASTER
- NetCAN+ is supported by CANHacker via Driver Mode

[>Back to top](#)

■ Power and Environment

Connector

3-pin Terminal Block with Protective Earth

Power requirements

9 - 54V DC, 0.3A @ 12V, 4W

Dimension

115×73×25 mm³ (W×L×H)

Operating Temp	-20°C - 65°C
Storage Temp	-20°C - 85°C
Case	SECC sheet metal (1mm)
Weight	0.25kg
Mounting	<ul style="list-style-type: none"> • DIN-Rail (optional) • Wallmount (optional)

[>Back to top](#)

■ Standards

Declarations	CE, FCC
EMI	<ul style="list-style-type: none"> • EN 55022 Class B • EN 61000-3-2: Limits of harmonic current emissions • EN 61000-3-3: Limitation of voltage changes • 47 CFR FCC Part 15 Subpart B
EMS (EN 55024)	<ul style="list-style-type: none"> • EN 61000-4-3: Radiated RFI • EN 61000-4-4: Electrical Fast Transient • EN 61000-4-5: Surge • EN 61000-4-6: Induced RFI • EN 61000-4-8: Power Frequency Magnetic Field • EN 61000-4-11: Power supply dips
ESD	EN 61000-4-2 4kV contact 8kV air for <ul style="list-style-type: none"> • CAN Bus Port • USB • Ethernet • DC Power connector

[>Back to top](#)

■ Ordering Information

429	NetCAN Plus 120 WLAN
------------	----------------------

[>Back to top](#)

■ Options

6679	Activate option viaVPN
6031	Power supply adapter 12V DC, 1A
6692	DK-NCP DIN-Rail mounting kit
6693	WK-NCP Wallmount kit

[>Back to top](#)

■ Packaging

Packing list	<ul style="list-style-type: none"> • NetCAN Plus 120 WLAN • Terminal block for Power Supply • Antenna • CD-ROM with Driver and configuration software
---------------------	---

[>Back to top](#)

VScom NetCAN Plus 120 WLAN

[>Back](#)



DIN-Rail Mounting Kit

[>Back](#)



Wall Mounting Kit

[>Back](#)



NETCAN on DIN-Rail

[>Back](#)



Remote Access option

[>Back](#)

